



SCT-10

Signal Conditioning Transmitter

INDICATORS /
CONTROLLERS

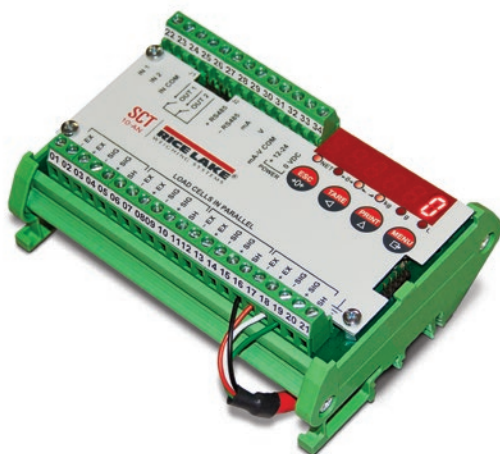

SCT-10 in Plastic Enclosure

Approvals



Standard Features

- Converts digital weight to analog output
- Sums four input channels in parallel
- Theoretical calibration, real-weigh calibration, linearity calibration
- Push-button or preset tare
- Full-scale analog output with zero setting and PLC correction of analog signal
- Displays weight, configuration, calibration and error conditions
- DIN-rail mounting, suitable for back panel
- Two digital inputs, two digital outputs
- Supports ASCII or MODBUS-RTU protocols

Part Number/Price

Part #	Description	Est. Weight	Price
129393	SCT-10 converter with Analog Output	1 lb	Consult
129394	SCT-10 converter with Analog Output in enclosure	1 lb	Consult

Options/Accessories

Part #	Description	Est. Weight	Price
88792	12VDC 1.2A DIN rail mount power supply	1 lb	Consult
119244	24VDC 1.3A DIN rail mount power supply	1 lb	Consult
131129	Installation manual	1 lb	Consult
199687	DIN rail clip right & left end clamp		Consult

Specifications

Power:

Input: 12 to 24 VDC

Power consumption:

5 W

Excitation Voltage:

5VDC, 120mA, 8 × 350 ohm load cells

Analog Signal Input Range:

+/-19.5 mV

Analog Signal Sensitivity:

0.3 μ V/graduation minimum

1.0 μ V/graduation recommended

A/D Sample Rate:

80 Hz

Resolution:

Internal : 16,000,000 counts

Display : 999,999

System Linearity:

± 0.01% full scale

Digital I/O:

2 inputs 5-24VDC, 2 outputs

24 VDC/60 mA

N.O. or N.C. (solid state)

Communication Ports

RS-485 or RS-232 simplex supports

up to 115,200 bps

Analog Output:

Optoisolated, 16 bit

0-20 mA, 4-20 mA (max 300 ohm)

0-10 VDC, 0-5 VDC, -10 to 10 VDC,

5 to 5 VDC, (min 10 k ohm)

Annunciators:

Net, center of zero, stability,

KG, G, LB

Display:

0.3 in (8 mm), six-digit, 7 segment LED

Keys/Buttons:

4-key membrane panel, tactile feel

Zero, Tare, Print, Menu, Escape,

Left and Up Navigation, Enter

Dimensions:

(L × W × H)

DIN Rail Mount: 4.84 × 3.62 × 1.96 in

(123 × 92 × 50 mm)

Enclosure: 6.69 × 5.51 × 3.74 in

(170 × 140 × 95 mm)

Temperature & Humidity:

Operating Temperature: -4 °F to 140 °F

(-20 °C to 60 °C)

Humidity: 85% non-condensing

Rating/Material:

DIN rail mount: NEMA Type 1

Enclosure: NEMA Type 4/IP67, plastic

Clear cover: six PG9 cord grips

Weight:

1 lb (0.5 kg)

Warranty:

One-year limited

Approvals:

cULus Recognized