


ControlNet™ Interface

920i®

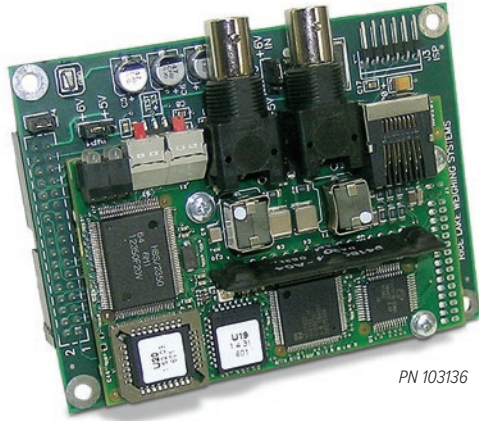

PN 103136

Standard Features

- Option for 920i
- Polled I/O connection
- Onboard LED diagnostics
- Floating-point commands support decimal points

Specifications

Power:

5 VDC, 350 mA (jumper for 6 VDC)

Fieldbus Interface:

BNC connector

Diagnostic LEDs:

TX/RX data, Good link, Status, Diagnostics

Dimensions:

2.13 × 3.38 × 0.59 in
(86 × 54 × 15 mm)

Temperature Range:

14 °F to 158 °F (-10 °C to 70 °C)

Part Number/Price

Part #	Description	Price
103136	ControlNet interface for 920i indicator	Consult
Cables		
Consult factory for coaxial cable with cord grips		

Options/Accessories

Part #	Description	Price
103122	Additional operating manual	Consult

EtherNet/IP® Interface

720i™/920i®



PN 87803

Standard Features

- Industrial protocol for Allen-Bradley PLC and other EtherNet/IP compliant devices
- IP address settings configurable with onboard DIP switched, web page, or ARP or DHCP
- Supports Rockwell Automation® EtherNet/IP level
- CE marked and UL conformance
- Onboard diagnostic LED
- Supports the Modbus/TCP protocol and conforms to Modbus/TCP specification 1.0

Specifications

Power:

5 VDC, 350 mA

Fieldbus Interface:

RJ-45

Diagnostic LEDs:

Link status, module status, network status, activity

Dimensions:

2.13 × 3.38 × 0.59 in
(86 × 54 × 15 mm)

Temperature:

14 °F to 158 °F (-10 °C to 70 °C)

Part Number/Price

Part #	Description	Price
87803	EtherNet/IP protocol card for 720i/920i indicators	Consult

Options/Accessories

Part #	Description	Price
88537	Additional operating manual	Consult